



## DECLARATION OF CONFORMITY

The undersigned, representing the

*Setra Group AB*  
*t/a Setra Trävaror AB and Setra Byggprodukter AB*

and manufacturing plants in

*Färila, Hasselfors, Heby, Horndal, Kastet, Kvarnåsen, Långshyttan, Lövholmen,  
Malå, Björklinge, Kalix, Skinnskatteberg, Skutskär, Valbo and Vimmerby*

herewith declares that the

### **Sawn, planed or profiled panelling and cladding with or without tongue and groove with characteristics and performance declarations as below**

#### **Characteristic**

#### **Performance declaration**

Intended use	Internal or external panelling/cladding for wall or ceiling
Species/species group	WPPA: spruce ( <i>Picea abies</i> ) and pine ( <i>Pinus sylvestris</i> )
Growth area	NNE Europe (Northern and North Eastern Europe)
Minimum thickness	8 mm
Reaction to fire	D-s2, d0 (CWFT – EN 14915, Table 1; density 390 kg/m <sup>3</sup> ; minimum total thickness 12 mm, minimum thickness 8 mm)
Formaldehyde class	E1
Content of pentachlorophenol	None
Water vapour permeability	60 (see EN 14915, clause 5.4)
Sound absorption coefficient	0,10/0,30 (see EN 14915, clause 5.5)
Thermal conductivity	0,11 (see EN 14915, clause 5.6)
Natural durability class	4 (EN 350-2)

**is in conformity with the provisions of the EC Directive 89/106/CEE (Construction Products Directive - CPD) and that Annex ZA of**


**EN 14915:2006**

**has been applied.**

The CE marking was affixed in 2008.

Setra Group AB,  
Box 3027  
169 03 Solna

Solna, 2008-05-23

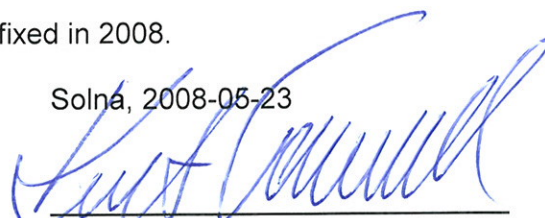

Kent Torwald, President and CEO